


ULR nominal < 1%



ULR nominal < 1%

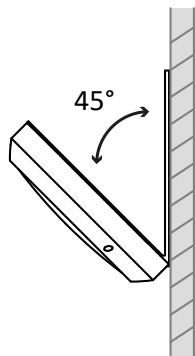

**HUBLOT LED 30CM - IP65**

HUB1600RWBCEE- 3700 619 436 609



IP65

**ULR**

<1%



CONS : 18W



1620 LM

90lm/w

Efficacité lumineuse

**LED**

SOURCE REMPLACABLE



230V~50Hz



3000K



120°

∅299  
x75mm

**IRC**

>80

**IK**

10



CONNECTEUR RAPIDE



50 000H



CLASS II



Conforme à l'arrêté du 27 Décembre 2018 relatif à la prévention , à la réduction des nuisances lumineuses

Cerf/Test report	Directive	Normes
EMC	2014/30/EU	<ul style="list-style-type: none"> <li>• EN IEC 55015 : 2019 + A11 : 2020</li> <li>• EN IEC 61000-3-2 : 2019</li> <li>• EN 61000-3-3 : 2013 + A1 : 2019</li> <li>• EN 61547 : 2009</li> </ul>
LVD	2014/35/EU	<ul style="list-style-type: none"> <li>• EN IEC 60598-1 : 2021</li> <li>• EN IEC 60598-2-1 : 2021</li> <li>• EN 62493 : 2015</li> <li>• EN 62471 : 2008</li> </ul>
Rohs	2011/65/EU	

Filaire 230V~50Hz  
 Cons. : 18W  
 Durée de vie : 50 000H  
 3000K – Blanc chaud  
 PC  
 Vis et chevilles incluses  
 ULR nominal < 1%  
 ULR sur site < 15%. Installation mural selon angle 45°  
 ULR sur site < 1% Installation plafond

CEE Fiches : RES-EC-104 (A14-1) prorogée depuis 2021 Dec.  
 Rénovation d'éclairage extérieur